





- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 5.08mm(.200")
- **Insulation:** Yellow Polyester
- **Temp. Rating :** -40°C- 105°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 2A~6A & 300V
- **Lenth:** Tailored, ≥10mm
- **Application:** dental equipment and instrument
- **Feature:** Flexible jumper strips in surface-mount or through-hole

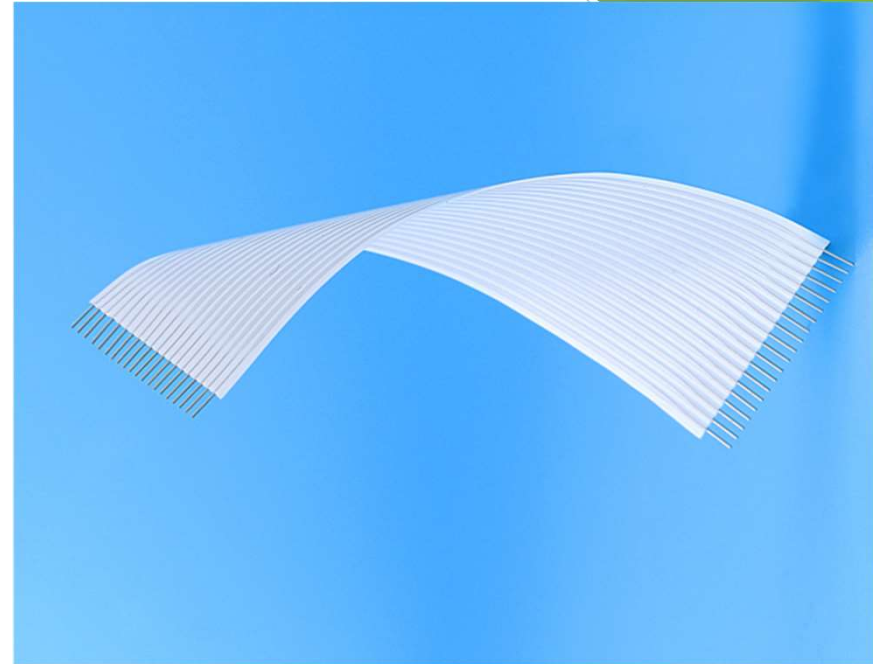

- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 1.27mm (.050")
- **Insulation:** PET
- **Temp. Rating :** -40°C- 105°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 0.5A ~2A & 80V
- **Lenth:** Tailored, ≥10mm
- **Application:** infrared thermometer, Solar Controller , pressure transducer
- **Feature:** Highly Flexible/Light Weight/Extremely Thin¹

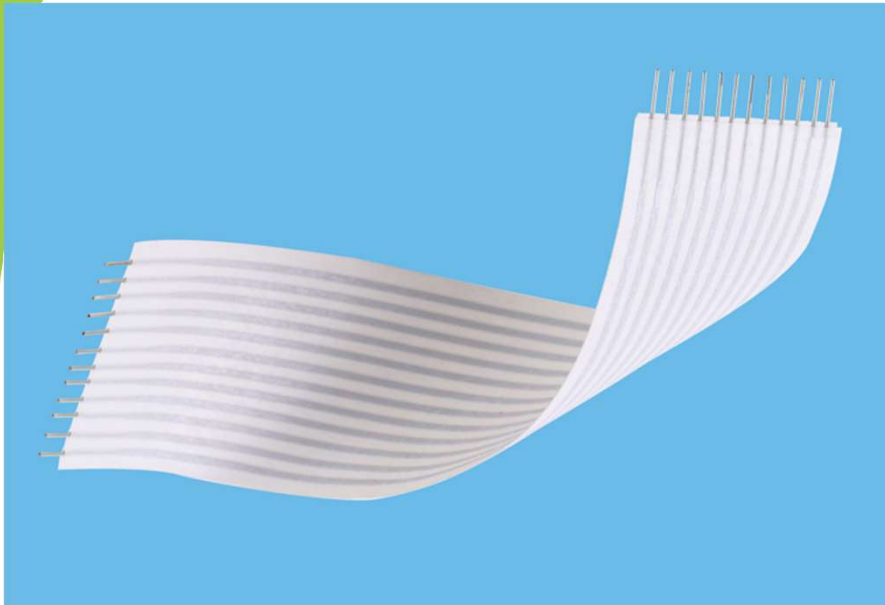


- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 2.54mm (.100")
- **Insulation:** Nomex
- **Temp. Rating** -40°C-125°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 2A~6A & 300V
- **Lenth:** Tailored, ≥10mm
- **Application:** automobile ABRS/flexible flat cable for airbag applications, turn signal line LED/automobile lamp
- **Feature:** Suitable for High Vibration Applications, Ready for installation




- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 2.54mm (.100")
- **Insulation:** Nomex
- **Temp. Rating** -40°C-125°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 2A~6A & 300V
- **Lenth:** Tailored, ≥10mm
- **Application:** automobile dashboard, Clock spring applications(Airbag, Multifunction, Steering Wheel heating)
- **Feature:** Available as THT capable JUMPER, Can be combined with several connectors



- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 2.54mm (.100")
- **Insulation:** Yellow Polyester
- **Temp. Rating :** -40°C- 105°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 2A~6A & 300V
- **Lenth:** Tailored, ≥10mm
- **Application:** pressure transducer, inverter, encoder
- **Feature:** Cost-Effective, economizes working time and assembly costs/Wide Temperature Range

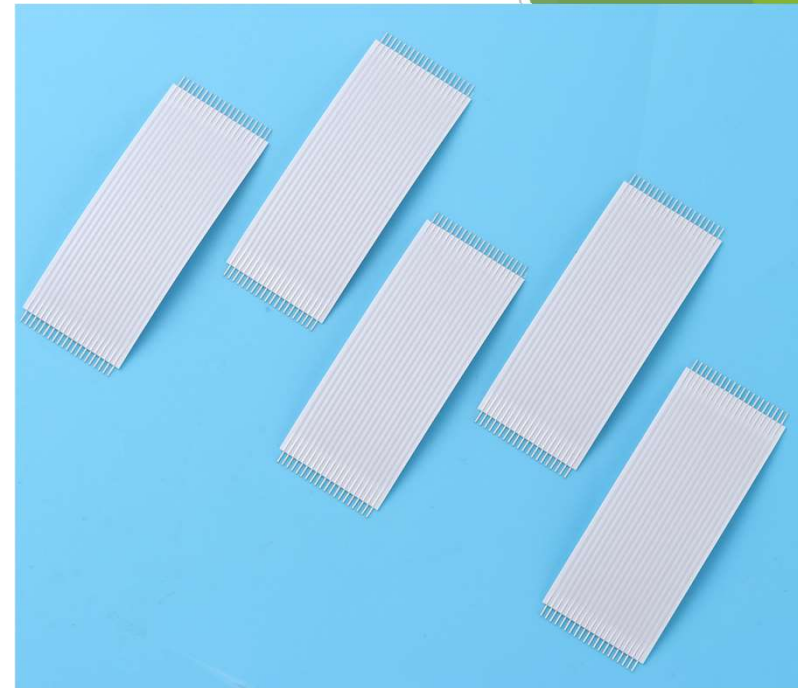

- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 1.25mm (.049")
- **Insulation:** Nomex
- **Temp. Rating :** -40°C- 125°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 0.5A ~2A & 80V
- **Lenth:** Tailored, ≥10mm
- **Application:** chemical analyzer, transducer
- **Feature:** Flat Flex Cable Assembly Solder Tab to Solder Tab

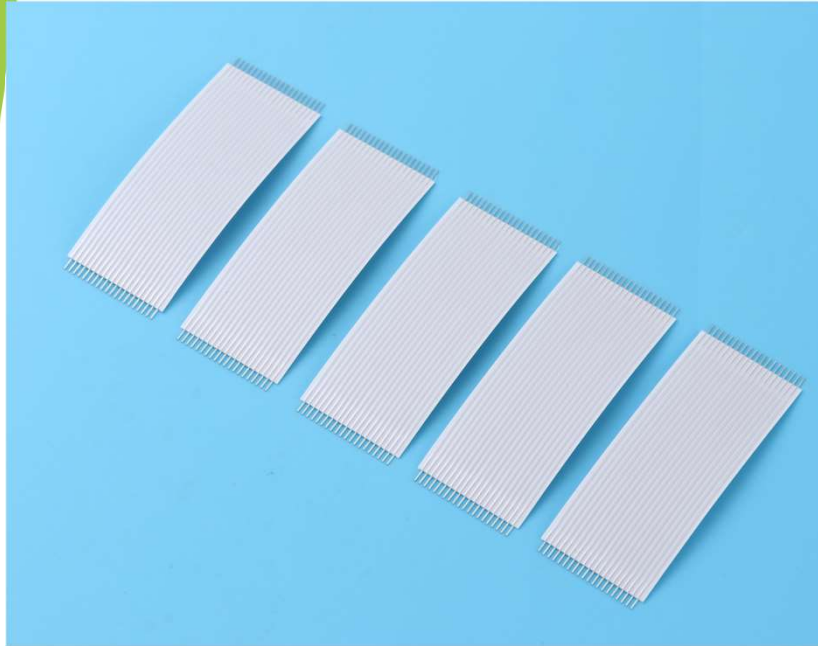

- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 1.27mm (.050")
- **Insulation:** Nomex
- **Temp. Rating :** -40°C- 125°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 0.5A ~2A & 80V
- **Lenth:** Tailored, ≥10mm
- **Application:** PLC single-chip servo stepper motor, Telecommunications/IT Equipment
- **Feature:** Reliable and fracture-safe connection, Simultaneous soldering of all connection points in the solder bath



- **Products name:** Round flat cable/Flex Jumper cable/Flex strip jumpers
- **Pitch:** 1.27mm (.050")
- **Insulation:** Nomex
- **Temp. Rating :** -40°C- 125°C
- **Numb. of conductor:** 2-50Pin
- **Current & Voltage:** 0.5A ~2A & 80V
- **Lenth:** Tailored, ≥10mm
- **Application:** climate sensors, smart water meter, power meter, water level detector
- **Feature:** contact reliability, low height profiles, compatibility with auto-insertion equipment